


VigoCPLy



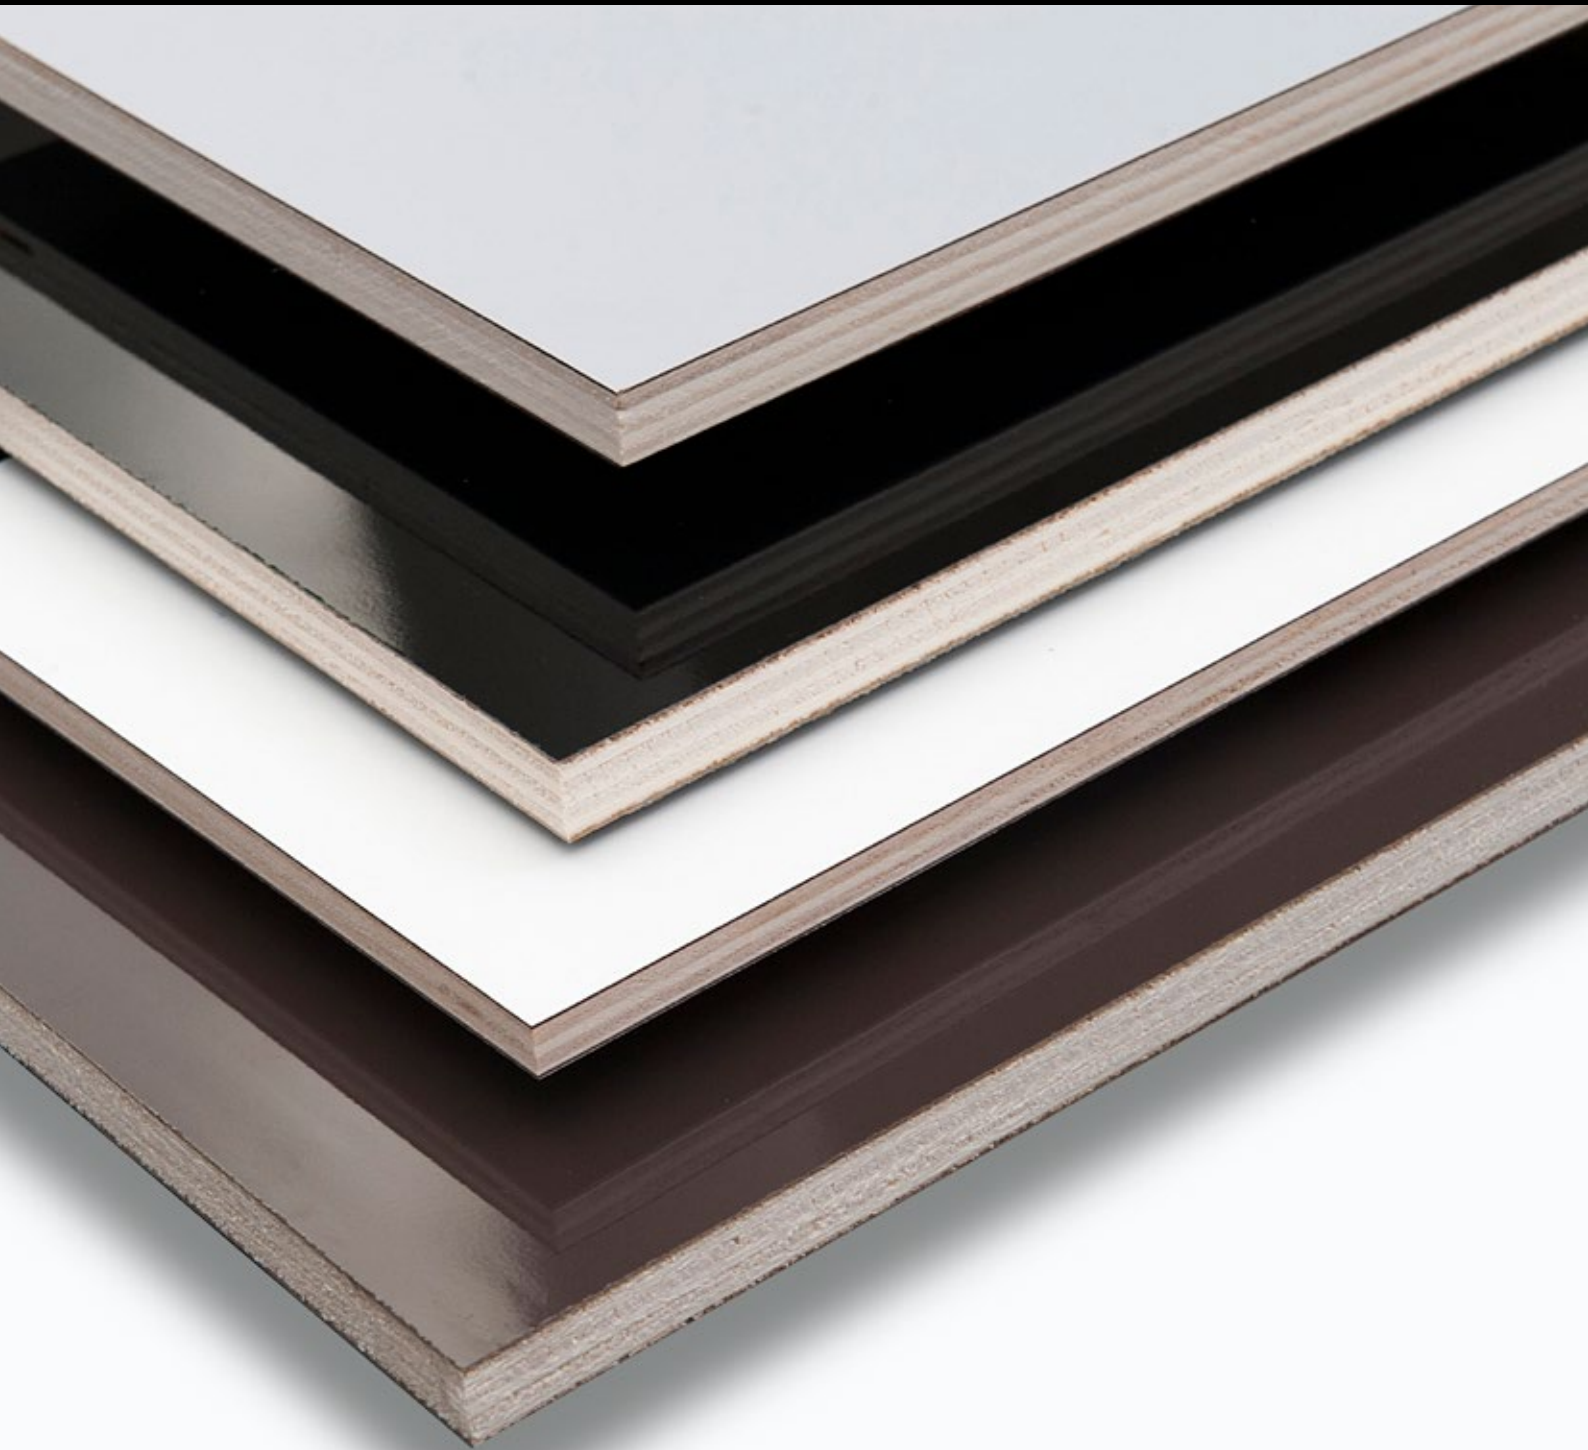

Description	Poplar plywood panel laminated with CPL. Manufactured in compliance with all applicable regulations	
Use	Shop fitting, marine, caravan and furniture industries	
Release of formaldehyde	E1	
Gluing class	Class 1, Class 2	EN 314-2
Certifications	PEFC, FSC	
Sizes	244 x 122, 252 x 187 cm	
Thicknesses	from 10 to 40 mm	EN 315
Dimensional tolerances	Length and width: +/-3,5 mm. Thickness +(0,2+0,03t); -(0,4+0,03t). Orthogonality: 1 mm/m	EN 315

The data in this sheet show approximate values obtained from internal testing on normal production. It is the buyer's responsibility to determine whether the products of E.Vigolungo SpA are suitable for the applications for which they are intended to be used and that the modes of transport and use comply with current regulations.